

# Multi-Spindle Rotary Cutters

2000 SERIES | 3000 SERIES | 4000 SERIES

IF IT DOESN'T SAY  
**BUSH HOG®**  
IT JUST WON'T CUT IT™



**10**  
**YEAR**  
**GEARBOX LIMITED**  
**WARRANTY**

**ON ALL ROTARY CUTTERS!\***  
(purchased 1/1/2020 or later)

# MULTI-SPINDLE ROTARY CUTTERS

2000, 3000, &  
4000 SERIES

2107 / 2208 / 2310 / 3308-2 / 3308SH-2 / 3510 / 3514 / 14215



## ***Nothing beats a Bush Hog®!***

Bush Hog®'s entire line of multi-spindle rotary cutters is designed for heavy crop clearing, pasture maintenance, and other big jobs that require a durable, reliable machine. With cutting widths from 7' – 15', and a range of hitch types and mounting options, these heavy, rigid deck cutters are built to withstand extreme duty and provide superior performance and productivity with minimal maintenance for many, many years.

## ***Your Best Choice for Maintaining Pastures and Rights-Of-Way or Cutting Orchards and Crop Residue.***

When you need a 7' - 15' rigid deck Multi-Spindle Rotary Cutter, Bush Hog® has you covered. The gearboxes and blades in Multi-Spindles are timed. So that, when heavy vegetation or an obstacle is encountered, specially-designed cross-shafts absorb the shock to maintain proper blade timing. One of our many varieties of models will work in virtually all applications, from maintaining orchards to shredding crop residue.

### **HITCH OPTIONS**

Depending on the model, hitch options include Category 1, 2, and 3 Standard and QH Lift-Type or Semi-Mount and Self-Leveling Pull-Types. Semi-Mount models are a great choice for use behind smaller horsepower tractors. The 3308SH-2 is equipped with a 13" variable offset swing hitch for clearing under fences and branches.




### ***2107 LIFT MODEL***

Min. Tractor PTO HP: 30 (lift)  
(with adequate front ballasts)

### ***2208 LIFT MODEL***

Min. Tractor PTO HP: 45 (lift); 35 (pull)

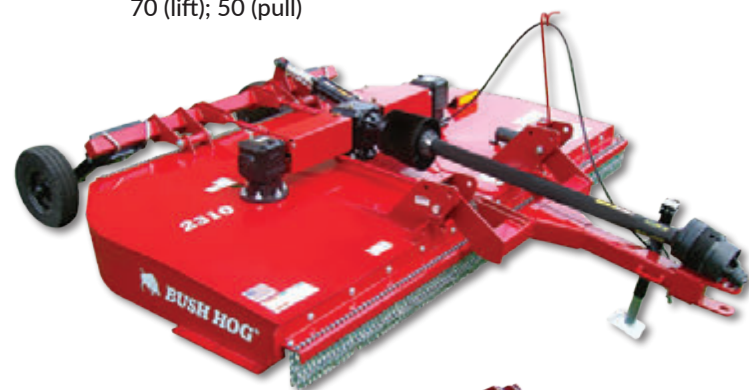

### ***2310 PULL MODEL***

Min. Tractor PTO HP:  
70 (lift); 50 (pull)



### **OTHER CHOICES**

Select manual or hydraulic lift, single or dual axles on pull models, laminated or used aircraft tires. Whatever your application for rotary cutting, you can equip each model to perform your particular cutting job.

### **CONSTRUCTION**

When it comes to construction, you don't get a lot of choices. That's because Bush Hog® has built every model to outperform and outlast other mowers.

Rugged construction is a standard feature. Strongbacks are 7-gauge box steel, and rubber cushioned axles give you plenty of load protection when working on rough terrain. Drivelines are fully shielded and tough slip clutches are standard on all models. Deep side bands and high blade tip speeds assure better cutting performance. Oval or round blade pans are standard equipment.

## SQ & 2000 SERIES MULTI-SPINDLE SPECIFICATIONS

MODELS:	2107	2208	2310
<b>Cutting Width</b>	7' 2"	8' 3"	9' 9"
<b>Cutting Capacity</b>	2" Diameter		
<b>Cutting Height</b>	1 ½" - 11"	1 ½" - 12"	
<b>Dimensions (width x length)</b>	7' 6" x 7' 4" (Lift)	8' 10" x 13' 4" (Pull)	10' 3" x 9' 4" (Lift) 10' 3" x 9' 4" (Semi-Mount) 10' 3" x 13' (Pull)
<b>Hitch Type</b>	Cat. 1 & 2 Std & QH	Cat. 1 & 2 Std. & QH (Lift) Cat. 1 & 2 Std. (Semi-Mount) Self-Leveling Pull-Type	Cat. 2 & 3 Std. & QH (Lift) Cat. 2 & 3 Std. (Semi-Mount) Self-Leveling Pull-Type
<b>Deck Thickness</b>	10 gauge	10 gauge	10 gauge
<b>Side Bands</b>	7 gauge x 11 ¾"		
<b>Min. Tractor PTO HP</b>	30 (W/ Adequate Front Ballasts)	35 (Pull); 45 (Lift)	50 (Pull); 70 (Lift)
<b>Driveline</b>	ASAE Category 3	ASAE Category 4	
<b>Cross Shaft</b>	Shock-Absorbing Rubber Plates		
<b>Gearbox HP</b>	140HP (Transfer); 65HP (Cutting)		
<b>Tractor PTO Speed</b>	540 RPM		
<b>Driveline Protection</b>	2-Plate Slip-Clutch		4-Plate PTO Slip-Clutch
<b>Height Adjustment</b>	Manual Tailwheel Height Adjustment		Manual Ratchet Jack or Hydraulic Cylinder (Pull)
<b>Blade Holders</b>	Oval Pan		Round Pan
<b>Blades</b>	1/2" x 4" Uplift		
<b>Blade Tip Speed</b>	Approx. 16,000 FPM	15,962 FPM	15,828 FPM
<b>Blade Overlap</b>	4"	4 ¾"	3"
<b>Tires</b>	15 ½" Laminated	15 ½" Laminated (Lift) 21" Laminated (Pull)	21" Laminated (Lift/Semi) 21" Laminated or 29" Aircraft (Pull)
<b>Axles</b>	Vertically Adjustable Beam		Adjustable Axle Arms for Row Spacing
<b>Safety Deflectors</b>	Single Chains (Front) Metal Band or Single Chains (Rear)	Single or Double Chains (Front) Metal Band, Single or Double Chains (Rear)	
<b>Safety Tow Chain</b>	N/A	Standard for Pull Models	
<b>Approximate Weight</b>	1200 lb.	1,600 lb. (Lift/Semi) 1,950 lb. (Pull)	2,100 lb. (Lift/Semi) 2,300 lb. (Pull)
<b>Warranty</b>	10-Year Gearbox Limited Warranty   1-Year Machine Limited Warranty		
<b>Features</b>	<ul style="list-style-type: none"> <li>• Rear Sloped Deck</li> <li>• High Blade Tip Speeds</li> <li>• Deep Sidebands</li> <li>• Quick Detach Cross-Shaft Shields</li> <li>• Strong Drivelines With Durable Multi-Plate Slip-Clutches</li> </ul>		

# 3000 Series Features



All Bush Hog® Multi-Spindle rotary cutters feature structural steel bracing and reinforced welding at all high stress points. Streamlined deck design inhibits trash and water buildup problems.



Shields over all cross shafts fold conveniently out of the way to allow quick access to clutch or universal joints.




Special rubber-cushioned axle arms reduce shock loads during operation and transport.



A wide angle, constant velocity driveshaft on pull models relieves the PTO working angle. This reduces vibration and allows smoother cutting in sharp turns.

## 3308SH-2 SWING HITCH MODEL

Min. Tractor PTO HP: 40 (semi-mount)

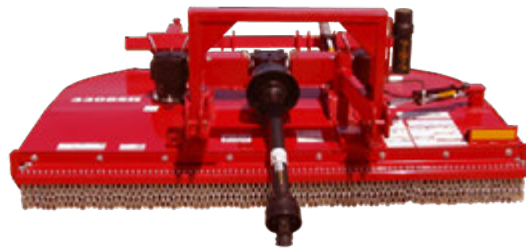

## 3308-2 LIFT MODEL

Min. Tractor PTO HP: 50 (lift); 40 (pull)



## 3510 LIFT MODEL

Min. Tractor PTO HP: 75 (lift)



## 3514 LIFT MODEL

Min. Tractor PTO HP: 90 (lift); 75 (pull)

## 3510 PULL MODEL

Min. Tractor PTO HP: 50 (pull)

All 3000 Series Lift Hitch models feature newly designed heavy duty casters sporting 21" Laminated Tires.



### OTHER CHOICES/3514 MODEL

For 30" - 40" row crops, when extra fine shredding is desired, an optional shredder attachment is available for the 3514 model to pulverize heavy stubble and provide thoroughly mixed crop residue.

Now available with ASAE Category 5 cross shafts with Category 4 shear pin/rubber element.



Wheel axles are attached by heavy duty pivot pins with replaceable bushings that extend through the cutter strongbacks. This dependable mounting arrangement provides extra strength and less pivot pin wear.



Warning: For non-agricultural use, OSHA, ASAE, SAE and ANSI standards require the use of chain guards or other protective guards at all times. Bush Hog® strongly recommends the use of such guards for agricultural uses as well, to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by or from contact with the cutting blades.

## 3000 SERIES MULTI-SPINDLE SPECIFICATIONS

MODELS:	3308-2	3308SH-2	3510	3514
<b>Cutting Width</b>	8' 3"		10' 6"	14'
<b>Cutting Capacity</b>	3" Diameter		3 ½" Diameter	
<b>Cutting Height</b>	2" to 13"			
<b>Dimensions (width x length)</b>	8' 10" x 7' 11" (Lift) 8' 10" x 7' 11" (Semi-Mount) 8' 10" x 12' 9" (Pull-Type)	8' 10" x 7' 11" (Semi-Mount)	11' 1" x 9' 10" (Lift) 11' 1" x 9' 10" (Semi-Mount) 11' 1" x 13' 11" (Pull-Type)	14' 7" x 9' 1" (Lift) 14' 7" x 9' 1" (Semi-Mount) 14' 7" x 13' 5" (Pull-Type)
<b>Hitch Type</b>	Cat. 1 & 2 Std. & QH (Lift) Cat. 1 & 2 Std. & QH (Semi-Mount) Self-Leveling Pull-Type		Cat. 2 & 3 Std. & QH (Lift) Cat. 2 & 3 Std. & QH (Semi-Mount) Self-Leveling Pull-Type	
<b>Deck Thickness</b>	10 gauge			
<b>Side Bands</b>	1/4 inch x 11 ¾ inches		1/4 inch x 10 inches	
<b>Min. Tractor PTO HP</b>	40 (Pull); 50 (Lift)	40 (Semi-Mount)	60 (Pull); 75 (Lift)	75 (Pull); 90 (Lift)
<b>Driveline</b>	ASAE Category 4 with Slip Clutch		ASAE Category 5 (540 RPM)	ASAE Category 5 (540 RPM); ASAE Category 4 (1000 RPM)
<b>Cross Shaft</b>	Fiber Disc		ASAE Cat. 5 Rubber Element	ASAE Cat. 5 Rubber Element with Cat. 4 Shear Pin/Rubber Element
<b>Gearbox HP</b>	140HP (Transfer); 130HP (Cutting)		210HP (Transfer); 210HP (Cutting)	
<b>Tractor PTO Speed</b>	540 RPM		540/1,000 RPM	
<b>Driveline Protection</b>	4 Plate PTO Slip Clutch			
<b>Height Adjustment for Heavy Duty Axle only</b>	Manual Ratchet or Hydraulic Cylinder			
<b>Blade Holder(s)</b>	Round			Straight or Round
<b>Blades</b>	1/2" x 4" - Uplift			
<b>Blade Tip Speed</b>	16,121 FPM/540 RPM		16,881 FPM (540 RPM)	15,242 FPM (540 RPM); 15,242 FPM (1000 RPM)
<b>Blade Overlap</b>	5"		3"	
<b>Tires</b>	Laminated, Airplane	Laminated	Laminated, Airplane (Pull Only)	Laminated, Airplane
<b>Axles</b>	Selection: Rigid Twin Beam Axle Bundle or Heavy Duty Axle Bundle with Shock Absorber on Lift or Semi-Mount; Heavy-Duty on Pull Type	Heavy Duty Axle Bundle with Shock Absorber	Rubber Cushioned Heavy Duty Axle Bundle for Lift and Semi-Mount; Single or Dual Wheel Axle choice for Pull models	Rubber Cushioned; Choice of Single or Dual Axle for Pull Models
<b>Deflectors</b>	Combination of Front and Rear Chains and Rear Band		Selection: Front Chains and Rear Bands or Chains	Front Belting and Rear Bands or Chains
<b>Safety Tow Chain</b>	Standard for Pull Model	N/A	Standard for Pull Models	
<b>Approximate Weight</b>	1,806 lb.	1,944 lb.	(Pull with Single Axle) 2,741 lb.	(Pull with Single Axle) 3,383 lb.
<b>Warranty</b>	10-Year Gearbox Limited Warranty   1-Year Machine Limited Warranty			
<b>Features</b>	<ul style="list-style-type: none"> <li>Standard Slip Clutch</li> <li>High Blade Tip Speeds</li> <li>Deep Sidebands</li> <li>Quick-Detach Gearbox Shields</li> </ul>		<ul style="list-style-type: none"> <li>High Blade Tip Speeds</li> <li>Deep Sidebands</li> </ul>	<ul style="list-style-type: none"> <li>High Blade Tip Speeds</li> <li>Deep Sidebands</li> <li>Standard Highway Lighting</li> </ul>

## 4000 Series Features

**14215 FRONT VIEW**



**14215 REAR VIEW**



### 14215 MULTI-SPINDLE SPECIFICATIONS

Cutting Width	15'
Transport Width	15' 7"
Cutting Height	1 ½" - 16"
Cutting Capacity	3 ½" Diameter
Min. Tractor PTO HP	125 (Lift)
Tractor PTO Speed	1000 RPM
Hitch Type	Category 2 and 3 Standard and Quick-Hitch
Deck Thickness	7 Gauge
Side Bands	1/4" x 10"
Transfer Gearbox	210 HP
Outboard Gearboxes	210 HP
Main Driveline	ASAE Category 5
Outboard Driveline	ASAE Category 5
Driveline Protection (Outboard)	Multi-Plate Slip-Clutch
Blade Holder	7 Gauge Round Pan
Blades	1/2" x 4" Uplift
Blade Overlap	3"
Blade Tip Speed	17280 FPM (Center); 15708 FPM (Outboard)
Axle Suspension	Spring-Loaded
Wheels	21" Laminated
Approximate Weight	3700 lb.
Safety Deflectors	Front and Rear Belting
Highway Light Kit	Standard
Warranty	10-Year Gearbox Limited Warranty and 1-Year Machine Limited Warranty; 10-Year Deck Rust-Thru Limited Warranty on Galvanized Decks

*Which Multi-Spindle*

# ROTARY CUTTER

*is right for you?*

**SOMETIMES, CHOICES ARE AS TOUGH AS OUR ROTARY CUTTERS,  
BUT DON'T WORRY – WE'RE HERE TO MAKE TOUGH JOBS SIMPLE.**



**OPEN HERE FOR A SIDE-BY-SIDE COMPARISON OF 'BUSH HOG'S'  
'MULTI-SPINDLE MODEL FEATURES AND SPECIFICATIONS**







# BUSH HOG® MULTI-SPINDLE ROTARY CUTTERS

## SPECIFICATION COMPARISON CHART

	2107	2208	2310	3308-2	3308SH-2	3510	3514	14215
<b>CUTTING WIDTH</b>	7' 1"	99"	117"	99"	96"	126"	168"	180"
<b>CUTTING HEIGHT</b>	1½" - 11"	1½" - 13"	1½" - 12"	1½" - 13"	1½" - 13"	1½" - 13"	1½" - 13"	1½" - 16"
<b>CUTTING CAPACITY</b>	2"	2"	2"	3"	3"	3½"	3½"	3½"
<b>HITCH TYPE</b>	Cat. 1 & 2 Std & QH	Cat. 1. & 2 Std & QH Semi-Mount   Pull	Cat. 2 & 3 Std & QH Semi-Mount   Pull	Cat. 1 & 2 Std & QH Semi-Mount   Pull	Semi-Mount	Cat. 2 & 3 Std & QH Semi-Mount   Pull	Cat. 2 & 3 Std & QH Semi-Mount   Pull	Cat. 2 & 3 Std & QH
<b>DECK THICKNESS</b>	10ga	10ga	10ga	10ga	10ga	10ga	10ga	7ga
<b>SIDEBAND THICKNESS</b>	7ga	7ga	7ga	1/4"	1/4"	1/4"	1/4"	1/4"
<b>SIDEBAND HEIGHT</b>	11¾"	11¾"	11¾"	11¾"	11¾"	10"	10"	10"
<b>DRIVELINE SIZE</b>	Cat. 3	Cat. 4	Cat. 4	Cat. 4	Cat. 4	Cat. 5	Cat. 5	Cat. 5
<b>DRIVELINE PROTECTION</b>	2-Plate Slip-Clutch	2-Plate Slip-Clutch	4-Plate Slip-Clutch	4-Plate Slip-Clutch	4-Plate Slip-Clutch	4-Plate Slip-Clutch	4-Plate Slip-Clutch	4-Plate Slip-Clutch
<b>TRANSFER GEARBOX (HP)</b>	140	140	140	140	140	210	210	210
<b>CUTTING GEARBOX (HP)</b>	65	65	130	130	130	205	205	205
<b>TRACTOR PTO SPEED</b>	540	540	540	540	540	540	540 or 1000	1000
<b>MIN. TRACTOR PTO HP</b>	30 (W/ Adequate Front Ballasts)	35 (Pull) 45 (Lift)	50 (Pull) 70 (Lift)	40 (Pull) 50 (Lift)	40	60 (Pull) 75 (Lift)	75 (Pull) 90 (Lift)	125
<b>BLADE HOLDER</b>	Oval Pan	Oval Pan	Round Pan	Round Pan	Round Pan	Round Pan	Round Pan or Shredder Bar	Round Pan
<b>BLADES</b>	1/2" x 4" Uplift	1/2" x 4" Uplift	1/2" x 4" Uplift	1/2" x 4" Uplift	1/2" x 4" Uplift	1/2" x 4" Uplift	1/2" x 4" Uplift	1/2" x 4" Uplift
<b>BLADE TIP SPEED (FPM)</b>	16,000	16,173	15,778	16,121	16,121	16,881	15,138	17,280/15,708
<b>TIRES</b>	15½" Laminated	15½" Laminated	21" Laminated 29" Aircraft (Pull)	15½" or 21" Dual Laminated (Lift) 21" Laminated, 25" Foam-Filled, or 29" Aircraft (Pull)	21" Laminated	21" Laminated (Lift) 21" Laminated, 25" Foam-Filled, 29" Aircraft (Pull)	21" Laminated (Lift) 21" Laminated or 25" Foam-Filled (Pull)	21" Laminated
<b>DEFLECTOR TYPE</b>	Chains or Metal Band	Chains or Metal Band	Chains or Metal Band	Chains or Metal Band	Chains or Metal Band	Chains or Metal Band	Belt or Chains	Rubber Belts
<b>APPROXIMATE WEIGHT (LB)</b>	1,200	1,650	2,000	1,800	1,900	2,800	3,400	3,700
<b>GEARBOX WARRANTY (YRS)</b>	10	10	10	10	10	10	10	10



IF IT DOESN'T SAY  
**BUSH HOG**®  
IT JUST WON'T CUT IT™

2501 Griffin Avenue, Selma, Alabama 36703

Tel: 800-363-6096 | Fax: 334-874-2701



**BushHog.com**



**CONTENT DISCLAIMER:**

The products and information contained in this literature are subject to change without notice. Bush Hog® reserves the right to improve our products and make changes to specifications, designs, and standard equipment without notice. For additional product information, please visit Bush Hog®'s website or see your dealer for complete details.