



4630-36 FOLDING SEEDER




- Sure Stand Seeding...36 Feet in Every Pass
- 12' Seeder Sections Hug the Contour of the Field
- 69 Bushel Seed Box Capacity when Equipped with High Capacity Seeders
- Electric Shut Off Clutches Control Each 12' Seeder Individually
- Smooth Hydraulic Front Folding Feature Brings Transport Width to Less than 13' 6"
- Rugged Center Frame, Heavy-Duty Floating Wing Hinges, Proven Transport System
- Hydraulics and LED Safety Warning Lights are Standard Equipment





When folded, the 4630-36 is less than 13' 6" wide. There is also adequate ground clearance for safe road travel. Mechanical transport locks are provided for safety while traveling and when the machine is parked.

Each seeder is attached to the main frame via a three-point hitch, which allows the seeders to raise and lower in the field without changing the position of the main frame.

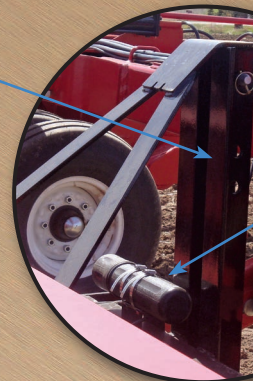

Hydraulic Leveling Hitch

Folding Hydraulic Row Marker Kits are available as an option. Unique Brome Box Agitator Kits, Rear Rollers with Turfmaker Sprockets, and Front Roller Scraper Kits are also available as optional equipment to customize or enhance the performance of the 4630-36 Folding Seeder.

The center section is carried by 12.5L x15 (GY-FI) Load F Tires with 8 Bolt Hubs and 2 7/8" Slip In Spindles.



Cast Single Lip Cat. IV Hitch

Parking Stand

4630-36 Folding Seeder Shown with Standard Agricultural Seeders with Front and Rear Seed Boxes and Optional Folding Row Marker Kit

4630-36 SERIES SPECIFICATIONS

	SSBP-36	SSP-136	SSP-
Description	(3) SSBP-12 Agricultural Seeders	(3) SSP-112 Agricultural Seeders	(3) SSP-2121 Ag
Approximate Weight (Empty)	18,440 lbs. (8,364 kg)	18,100 lbs. (8,210 kg)	20,366 lbs
Working Width	36 ft. (10.97 m)	36 ft. (10.97 m)	36 ft. (1
Transport Width	13 ft. 6 in. (4.1 m)	13 ft. 6 in. (4.1 m)	13 ft. 6 in
Transport Height	11 ft. (3.4 m)	11 ft. (3.4 m)	11 ft.
Overall Length	31 ft. (9.4 m)	31 ft. (9.4 m)	31 ft.
Hitch	Cast Single Lip Cat. IV	Cast Single Lip Cat. IV	Cast Single
Wheels - Center Section	8 Bolt Hubs with 2 7/8 in. (73.1 mm) Slip In Spindles	8 Bolt Hubs with 2 7/8 in. (73.1 mm) Slip In Spindles	8 Bolt Hubs with 2 7/8 in.
Wheels - Wings	6 Bolt Hubs with 2 in. (50.8 mm) Spindles	6 Bolt Hubs with 2 in. (50.8 mm) Spindles	6 Bolt Hubs with 2 in
Tires - Center Section	(4) 12.5L x 15, (GY-FI) Load F	(4) 12.5L x 15, (GY-FI) Load F	(4) 12.5L x 15
Tires - Wings	(4) 11L x 15, 12 Ply	(4) 11L x 15, 12 Ply	(4) 11L x
Hydraulic Circuits Required	3 (+1 for Row Marker Kit)	3 (+1 for Row Marker Kit)	3 (+1 for Row
Seed Box	All Steel Construction	All Steel Construction	All Steel C
Seed Box Capacity	15.75 Bushels (555.0 l) Front / 15.75 (555.0 l) Bushels Rear	27 Bushels (951.5 l)	69 Bushels
Seed Metering	Standard Micro-Meter Front / Cage Agitator Rear	Standard Micro-Meter	High Capacity
Seed Metering Drive	Independent Electric Seeder Clutches	Independent Electric Seeder Clutches	Independent Elect
Pulverizer Rollers	Gray Cast Iron with Notched Profile	Gray Cast Iron with Notched Profile	Gray Cast Iron wi
Front Roller (Fixed)	14.5 in. (368.3 mm) Diameter	14.5 in. (368.3 mm) Diameter	14.5 in. (368.3
Rear Roller (Independent Floating)	10.25 in. (260.4 mm) Diameter	10.25 in. (260.4 mm) Diameter	10.25 in. (260.
Blade Agitator for Rear Seed Box	Optional	NA	N
Brush Agitator for Rear Seed Box	Optional	NA	N
Front Seed Box Divider Kit	Optional	NA	N
Rear Roller Assembly with Turfmaker Sprockets	Optional	Optional	Opt
Folding Row Marker Kit	Optional	Optional	Opt
Wheel Track Removers - Wings	Standard	Standard	Stan
Coil Tine Track Remover Kit - Center Section	Standard	Standard	Stan
Front Roller Scraper Kit for Three Seeders	Optional	Optional	Opt
Front Roller Scraper Kit for One Seeder	Optional	Optional	Opt
Electronic Acre Meter Kit	Standard	Standard	Stan
LED Safety Warning Lights & SMV Emblem	Standard	Standard	Stan
Safety Chain Kit	Standard	Standard	Stan
Horsepower Requirements	Minimum of 200 HP (149.1 kW)	Minimum of 200 HP (149.1 kW)	Minimum of 20
Recommended Operating Speed	4.5 to 6.0 MPH (7.2 to 9.7 km/h) Dependent on Conditions	4.5 to 6.0 MPH (7.2 to 9.7 km/h) Dependent on Conditions	4.5 to 6.0 MPH Dependent o

Specifications subject to change without notice.

4630-36 FOLDING SEEDER



2361	SLP-2361	SLPB-2361	SLP-3361
Agricultural Seeders	(3) SLP-2121 Turfmaker II Seeders	(3) SLPB-2121 Turfmaker II Seeders	(3) SLP-3131 Turfmaker III Seeders
(9,238 kg)	19,352 lbs. (8,778 kg)	20,042 lbs. (9,091 kg)	20,366 lbs. (9,238 kg)
10.97 m)	36 ft. (10.97 m)	36 ft. (10.97 m)	36 ft. (10.97 m)
13.4 m)	13 ft. 6 in. (4.1 m)	13 ft. 6 in. (4.1 m)	13 ft. 6 in. (4.1 m)
11 ft. (3.4 m)	11 ft. (3.4 m)	11 ft. (3.4 m)	11 ft. (3.4 m)
31 ft. (9.4 m)	31 ft. (9.4 m)	31 ft. (9.4 m)	31 ft. (9.4 m)
Cast Single Lip Cat. IV	Cast Single Lip Cat. IV	Cast Single Lip Cat. IV	Cast Single Lip Cat. IV
(73.1 mm) Slip In Spindles	8 Bolt Hubs with 2 7/8 in. (73.1 mm) Slip In Spindles	8 Bolt Hubs with 2 7/8 in. (73.1 mm) Slip In Spindles	8 Bolt Hubs with 2 7/8 in. (73.1 mm) Slip In Spindles
(50.8 mm) Spindles	6 Bolt Hubs with 2 in. (50.8 mm) Spindles	6 Bolt Hubs with 2 in. (50.8 mm) Spindles	6 Bolt Hubs with 2 in. (50.8 mm) Spindles
(GY-FI) Load F	(4) 12.5L x 15, (GY-FI) Load F	(4) 12.5L x 15, (GY-FI) Load F	(4) 12.5L x 15, (GY-FI) Load F
15, 12 Ply	(4) 11L x 15, 12 Ply	(4) 11L x 15, 12 Ply	(4) 11L x 15, 12 Ply
Row Marker Kit)	3 (+1 for Row Marker Kit)	3 (+1 for Row Marker Kit)	3 (+1 for Row Marker Kit)
Construction	All Steel Construction	All Steel Construction	All Steel Construction
(2,431.5 l)	69 Bushels (2,431.5 l)	69 Bushels (2,431.5 l) Front / 27.3 Bushels (962.0 l) Rear	69 Bushels (2,431.5 l)
High Capacity Micro-Meter	High Capacity Micro-Meter	High Capacity Micro-Meter Front / Standard Micro-Meter Rear	High Capacity Micro-Meter
Independent Electric Seeder Clutches	Independent Electric Seeder Clutches	Independent Electric Seeder Clutches	Independent Electric Seeder Clutches
Gray Cast Iron with Notched Profile	Gray Cast Iron with Notched Profile	Gray Cast Iron with Notched Profile	Gray Cast Iron with Notched Profile
14.5 in. (368.3 mm) Diameter	14.5 in. (368.3 mm) Diameter	14.5 in. (368.3 mm) Diameter	14.5 in. (368.3 mm) Diameter
10.25 in. (260.4 mm) Diameter	10.25 in. (260.4 mm) Diameter	10.25 in. (260.4 mm) Diameter	10.25 in. (260.4 mm) Diameter
NA	NA	NA	NA
NA	NA	NA	NA
NA	NA	NA	NA
Optional	Optional	Optional	Optional
Optional	Optional	Optional	Optional
Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard
Optional	Optional	Optional	Optional
Optional	Optional	Optional	Optional
Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard
200 HP (149.1 kW)	Minimum of 200 HP (149.1 kW)	Minimum of 200 HP (149.1 kW)	Minimum of 200 HP (149.1 kW)
4.5 to 6.0 MPH (7.2 to 9.7 km/h)	4.5 to 6.0 MPH (7.2 to 9.7 km/h)	4.5 to 6.0 MPH (7.2 to 9.7 km/h)	4.5 to 6.0 MPH (7.2 to 9.7 km/h)
Dependent on Conditions	Dependent on Conditions	Dependent on Conditions	Dependent on Conditions

4630-36 Folding Seeder

Brillion Sure Stand Seeders have set the bar for exceptional grass and alfalfa seeding for well over fifty years. As production agriculture has grown, so has the demand for a larger capacity Sure Stand Seeder – and Brillion Farm Equipment has stepped up to meet the challenge. The Sure Stand seeding concept has stayed the same; however, thirty-six feet can now be seeded with each pass around the field!

Producers will have peace of mind that even though the seeding capacity has gone up, the 4630-36 will still afford the same industry leading performance the Brillion Sure Stand Seeder is famous for. The 4630-36 is a combination of the proven Landoll front folding grain drill hitch and the iconic Brillion twelve foot Sure Stand Seeder. This provides a state of the art machine with a quick transition from road transport of 13' 6" to a full seeding width in a matter of minutes, right from the comfort of the tractor cab. (Transport locks are required for safety purposes.)

One of the key features of the 4630-36 is the ability of the main frame to allow each of the three seeders to operate completely independently of each other. That equates to the ability to seed thirty-six feet wide with the convenience and field hugging features of a twelve foot machine. The individual, frame mounted three-point hitches raise and lower the seeders without changing the position of the main frame. This allows the operator to raise the seeders at the end of the field for effortless turning.

The design of the 4630-36 will allow the machine to be ordered with a choice of electric clutch controlled twelve foot seeders. There are seeder models available for agricultural applications and turf use, with some models adaptable to both capacities with minor modifications. The seed box capacity will vary with the model of seeders chosen. A variety of options and accessories are available to customize or enhance the performance of the 4630-36.

Also available from
Brillion Farm Equipment



Pulverizers



Pulvi-Mulchers



*Compaction
Commanders*



Till 'N Seed®

Brillion
Farm Equipment

220 N. Francis Street

P.O. Box 8

Brillion, WI 54110

Phone: 920.524.2220

Toll Free: 855.320.0373

Fax: 888.761.8568

